
## **Rack Strip**



'L'section 14 gauge (2.0mm)steel angle 50mm x18mm.Standard punching in narrow flange for rack mounting, mounting slots punched in wide flange. Supplied in 1820mm lengths (41U). Finished zinc plated and yellow passivated Ideal for DIY racks using Dexion etc,or for flight cases,console inset mounting etc.

Cage nuts type 16-026 are suitable for use with this

strip.

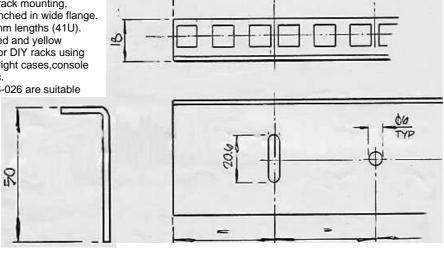

IU

IU

## Double angle

Double angle 16 gauge (1.5mm)steel angle. Standard punching in narrow flange for rack mounting,mounting slot punched in wide flange,standard punching in 'sideways' rear flange for mounting horizontal rails,slides, cable tray etc.

Supplied in 1820mm lengths (41U). Finished zinc plated and yellow passivated. Cage nuts type 16-025 are suitable for use with this strip. Construction note:Spacing between outer (mounting)verticals should be 486mm.

This then gives correct alignment of holes and DIN standard aperture width of 450mm.

