
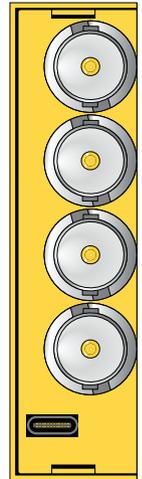


4-Channel 3G-SDI Fiber Transceiver

LYNX | Centraal™

yelloGUI ✓

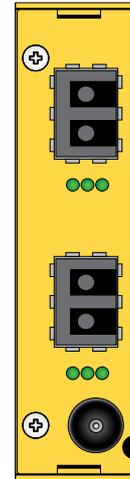

Features

- Supports 3G-SDI video up to 1080p60
- 3G Level A and Level B support (all formats)
- Auto reclocking 270Mbit/s, 1.5Gbit/s, 3Gbit/s
- Bidirectional - send and receive on single fiber
- Error free optical connections
- Up to 10km (6.2 miles) @ 3Gbit/s
- Simplex LC/PC singlemode fiber connection
- Supports hot swapping and hot plugging

Description

The OBD 1814 is a bidirectional fiber transmitter and receiver which uses two single fiber links in a compact form factor. It is a convenient and cost-effective solution to optimize the distribution of uncompressed broadcast quality video signals over long distances.

The OBD 1814 modules are supplied in pairs, one Type A and one Type B which work together in a WDM closed loop application. Each module has two electrical SDI input and two SDI output BNC connectors. They use two single fiber links between the modules.

Each channel is fully independent and can have different standards and formats of SDI video. The modules auto-detect and re-clock any 270Mbit/s, 1.5Gbit/s, or 3Gbit/s SDI source prior to conversion. The modules are fully compatible with 3G Level A and Level B formats.

Note: This system used WDM optical multiplexing and should only be used in point to point applications. This solution cannot be integrated into a CWDM multiplexed system.

*Distance is an approximation. Actual distances achieved can be longer or shorter depending on the type of cable. Determine link losses and perform optical budget calculations to ensure correct operation.

Technical Specifications

SDI Video	2x 3G-SDI inputs on 75 Ohm BNC connector			
	SMPTE 424M, SMPTE 292M, SMPTE 259M			
	Multi-standard operation from 270Mbit/s to 3Gbit/s			
	Multi-rate reclocking: 270Mbit/s - 1.5Gbit/s - 3Gbit/s			
Electrical Return Loss:	to 270MHz >10dB	to 1.5GHz >7dB	to 3GHz >10dB	
Automatic cable EQ:	270Mbit/s	1.5Gbit/s	3Gbit/s	
	250m	220m	150m	
	Belden 1694A			
Fiber Optics	2 x Simplex Transceiver fiber connection (LC/PC Connection)			
	SMPTE 297-2006			
Wavelength:	Type A	TX: 1310nm / RX: 1550nm (WDM)		
	Type B	TX: 1550nm / RX: 1310nm (WDM)		
Optical power:	Type A / B	-8dBm to -3dBm		
RX Sensitivity	Type A / B	-16dBm @270Mbit/s - 3Gbit/s		
	TX & RX active LED on side of module			
Max. distance*	10km (6.2 miles) @ 3Gbit/s			
Power	+12V DC @ 2.4W excl. SFPs - (supports 7 - 24V DC input range)			
	Power LED on side of module			
Physical (per module)	Size	140mm x 83.8mm x 22mm		
	(incl.connectors)	(5.51" x 3.29" x 0.86")		
	Weight	168g/6oz excl. SFPs, 268g/9.5oz incl. SFPs		
Ambient	5 - 40°C (41 - 104°F) 90% Humidity (non condensing)			
Model #	OBD 1814	EAN# 425048082989		
Includes	2x Modules, 2x SFPs per Module, 2x Power Supplies			


Optional Accessories

Rack Frames

This yellobrik can be placed in a rack frame along others to build increasingly complex systems, all monitored and controlled with a rack controller (RCT 1012) and server module (SRV 1000) via a PC or MAC using LynxCentral.

The RFR 1200 offers additional power redundancy with GPI alert. It automatically closes a connection between the A and B terminals on power failure.


The RPS A100 is a 100W power supply, which can be mounted at the rear end of the RFR 1200 with an RXT A100 power supply holder for rack frames.

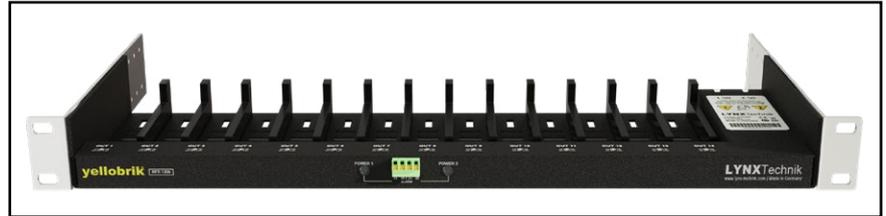

RFR 1200: yellobrik Rack Frame



RPS A100: 100W Power supply

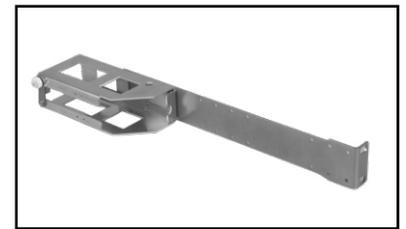


RXT A100: Power Supply Holder

Fiber Adapter Cables


While some of our products offer LC, ST and SC fiber connectors, most SFPs in our product range offer LC fiber connectors.

To still allow the necessary flexibility in a professional setting we offer patch cables to convert LC to ST or SC fiber connections. These patch cables' insertion loss and return loss are manually checked for each individual cable to allow for maximum precision when calculating the optical budget.


Besides the selection here we offer LC/FC and LC/LC patch cables.

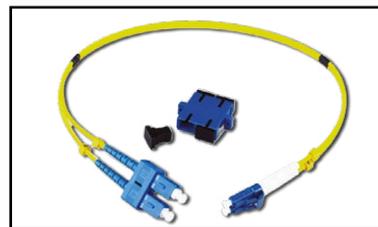


LC/SC Dup: LC/SC Duplex adapter cable

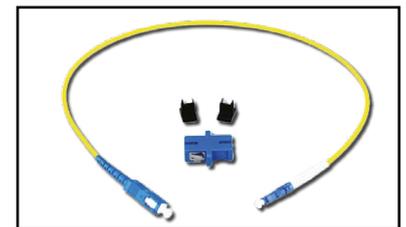

LC/SC Sim: LC/SC Simplex adapter cable

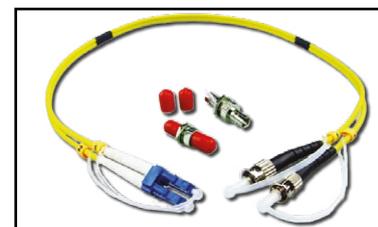

LC/ST Dup: LC/ST Duplex adapter cable

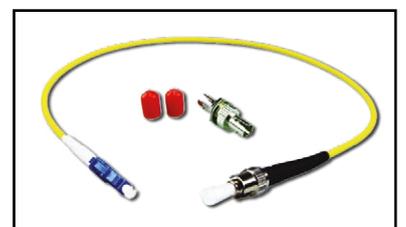

LC/ST Sim: LC/ST Simplex adapter cable

Power Adapter Options

The power requirements of this yellobrik allow for the usage of P-Tap or XLR connection based power sources.

Note: This does not replace the included power supply.



P-TAP 1000
Use with a standard battery P-TAP power source.



XLR 1000
Use with a standard 4 pin XLR camera battery power source.