

MB 2k

Handheld/Stand Unidirectional Dynamic Instrument Microphone




The industry standard for affordable instrument microphones, the MB 2k features a unidirectional dynamic element design for outstanding off-axis rejection and feedback control. Its frequency response is tailored for optimal instrument pickup. This rugged, all-metal mic is equipped Audio-Technica's Hi-ENERGY® neodymium magnet structure for maximum output and fast transient response, with noise-reducing soft-touch finish, MagnaLock™ switch design for silent on/off operation, and a corrosion-resistant gold-plated XLRM-type connector.

- Smart-priced introductory microphone for amplified and acoustic instruments
- Tailored frequency response for optimal instrument reproduction
- Unidirectional dynamic element design
- Rugged all-metal construction
- Hi-ENERGY® neodymium magnet for improved output and transient response
- Soft-touch finish reduces mechanical noise
- Silent on-off operation thanks to MagnaLock™ switch design
- Corrosion-resistant gold-plated XLRM-type connector
- 5-year warranty
- Also available as:
MB 2k/c with 15' cable

SPECIFICATIONS

ELEMENT	Neodymium Dynamic
POLAR PATTERN	Unidirectional
FREQUENCY RESPONSE	60-14,000 Hz
OPEN CIRCUIT SENSITIVITY	-54 dB (1.9 mV) re 1V at 1 Pa
IMPEDANCE	600 ohms
SWITCH	MagnaLock™ on/off
WEIGHT	11.9 oz (337 g)
DIMENSIONS	7.23" (183.6 mm) long, 1.63" (41.4 mm) head diameter
OUTPUT CONNECTOR	Integral 3-pin gold-plated XLRM-type
ACCESSORIES FURNISHED	AT8470 Quiet-Flex™ stand clamp for 5/8"-27 threaded stands; 5/8"-27 to 3/8"-16 threaded adapter; soft protective pouch
AUDIO-TECHNICA CASE STYLE	T2

Polar Pattern

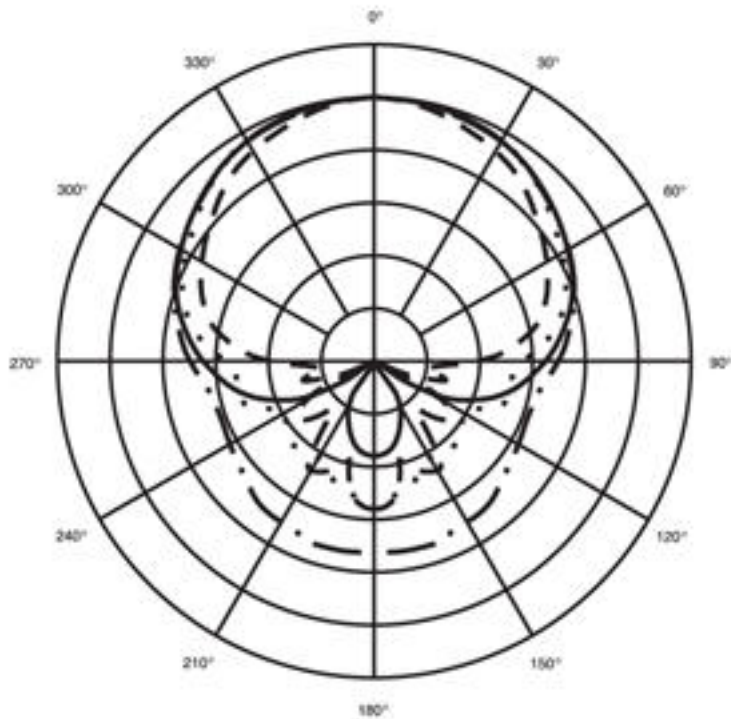


SCALE IS 5 DECIBELS PER DIVISION

LEGEND

- 200 Hz — · — ·
- 1 kHz —————
- 5 kHz · · · · ·
- 8 kHz - - - - -

MB2k & MB2k/c

Frequency Response

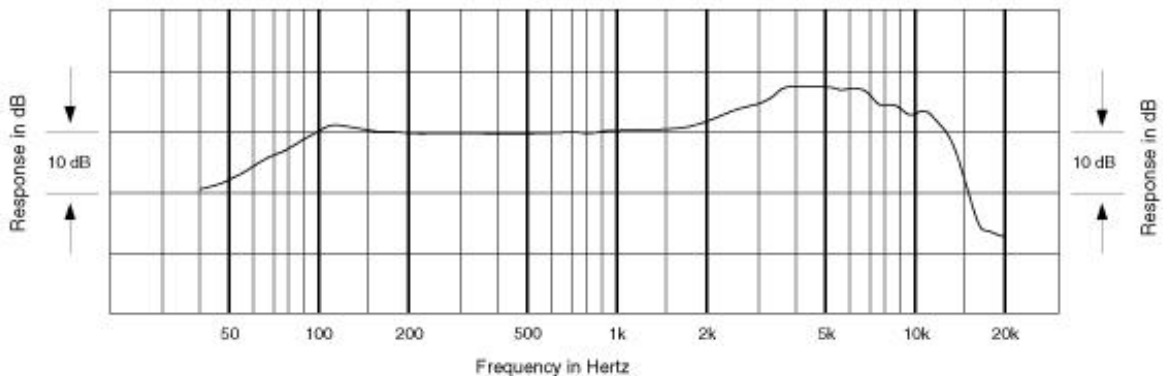

LEGEND ————— 12" or more on axis