

■ DESCRIPTION

Equipped with 6 Microphone inputs and 5 AUX inputs (simultaneous use of 9 inputs possible), the A-1712 PA amplifier of 120 W is designed to suit the following PA system applications: announcements, BGM, and broadcasting in mosques, churches, large rooms, and factories.


■ SPECIFICATIONS

* 0 dB = 1 V


Power Source	240 V AC, 50/60 Hz
Rated Output	120 W
Power/Current Consumption	258 W (rated output), 105 W (EN60065), under 320 mA (when power switch is OFF)
Frequency Response	50 - 20,000 Hz (±3 dB)
Distortion	Under 2% at 1 kHz, rated power
Input	MIC 1 - 6: -60 dB*, 600 Ω, electronically-balanced, combined type of XLR-3-31 equivalent and phone jack AUX 1 - 2: -20 dB*, 600 Ω, electronically-balanced, combined type of XLR-3-31 equivalent and phone jack (Either MIC 5 or AUX 1, and either MIC 6 or AUX 2 selectable) AUX 3 - 4: -20 dB*, 10 kΩ, unbalanced, RCA pin jack AUX 5: -20 dB*, 10 kΩ, unbalanced, combined type of XLR-3-31 equivalent and phone jack PWR AMP IN: 0 dB*, 600 Ω, unbalanced, RCA pin jack (An equalizer or other signal processor connectable between LINE OUT and PWR AMP IN terminals)
Output	REC: 0 dB*, 600 Ω, unbalanced, RCA pin jack LINE: 0 dB*, 600 Ω, unbalanced, RCA pin jack SPEAKER SELECTOR: 2 zone, high impedance (100 V line/83 Ω), individual selector key, M4 screw terminal DIRECT SPEAKER OUT: High impedance (100 V line/83 Ω), M4 screw terminal Low impedance (4 - 16 Ω), M4 screw terminal (Both Low and High impedance terminals cannot be used at the same time.)
Phantom Power	ON or OFF for each MIC1 - 6 with switch setting
S/N Ratio (Band Pass : 20 - 20,000 Hz)	Over 100 dB (Master volume: min) Over 76 dB (Master volume: max) Over 60 dB (MIC 1 - MIC 4) Over 53 dB (MIC 5, MIC 6) Over 76 dB (AUX 1 - AUX 5)
Tone Control	Bass: ±10 dB at 100 Hz, Treble: ±10 dB at 10 kHz
Control Input	REMOTE VOLUME: M3 screw terminal POWER REMOTE: No-voltage make contact input, open voltage: 28 V DC (when the unit's power is OFF), short-circuit: under 10 mA, M3 screw terminal
Indicator	5 point LED output level meter, Power indicator LED, Zone indicator LED
Operating Temperature	-10°C to +40°C
Finish	Panel: ABS resin, black, hair line Case: Steel plate, black
Dimensions	420 (W) × 107.7 (H) × 367 (D) mm
Weight	12.6 kg
Accessory	Power cord1, Terminal block cover1, Terminal block cover mounting screw2
Option	Rack mounting bracket: MB-25B Volume control cover: YA-920

[Note] Distance between barriers on the above screw terminals: M3 ... 7 mm, M4 ... 9 mm


■ APPEARANCE

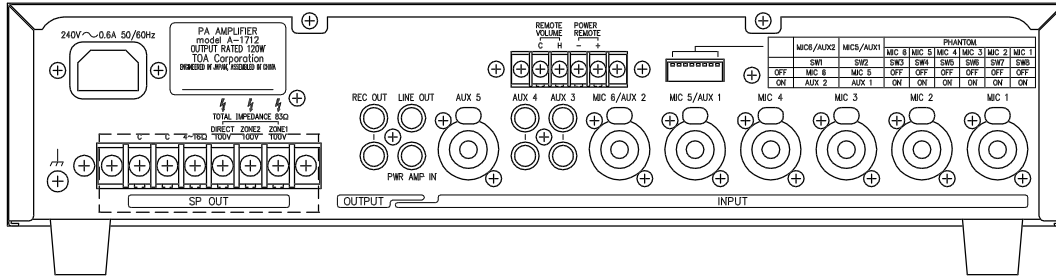

Rear View

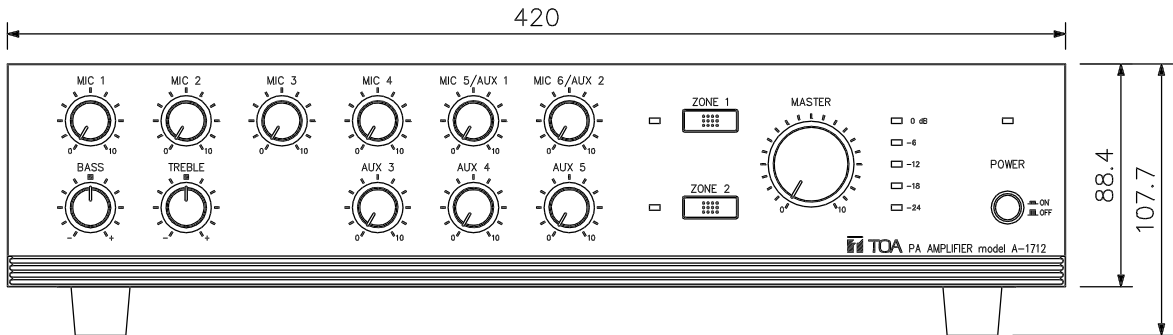

Front View

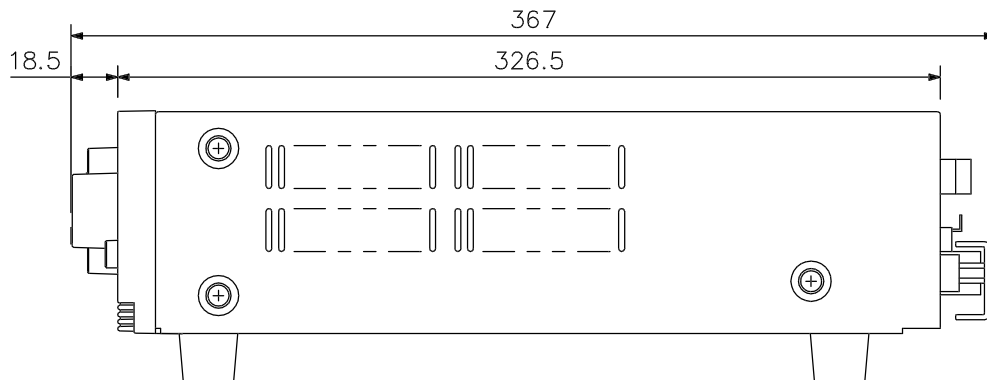

Side View

UNIT:mm SCALE:1/3