


3G/HD/SD-SDI Audio Monitor with Trim Control

AMP1-16-M

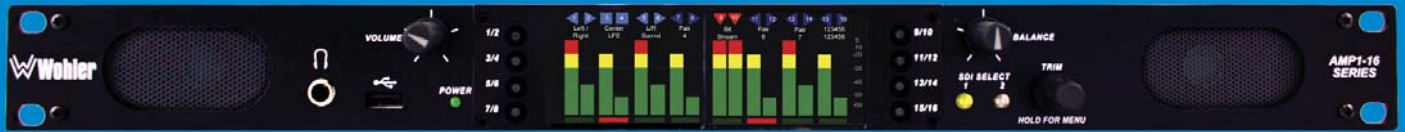

Compact, low-cost unit to select and monitor up to 16 audio channels from either of two 3G/HD/SD-SDI inputs

Wohler's newest audio monitor offers fast, intuitive operation for monitoring SDI audio in the most demanding production applications. Whether in the studio or on the road, the AMP1-16-M provides instantaneous selection and summing of any grouping of SDI audio pairs. It features adjustable volume and balance controls, clear display of levels, and phase indications on bright 2.4" LED-backlit LCD displays with configurations that can be created, saved and recalled via Ethernet or USB flash drive using an intuitive PC interface.

Features

- Simultaneous level metering of 16 de-embedded audio channels from SDI
- High resolution metering with 166-segment displays
- Quick, intuitive push-button selection of any pairs to sum to monitor
- Monitor through built-in speakers, headphones or analog outputs with optional muting for internal speakers
- Stereo or mono monitoring
- Stereo phase indicators
- Adjustable Volume and Balance
- Adjustable Channel Trim
- Easy update and management software for PCs
- Balanced stereo analog outputs on XLR-Ms. Fixed level or volume/balance controlled.
- Automatic frame rate detection and selection
- Totally digital system architecture with high fidelity Class D amp
- Selectable line level or front panel volume control and outputs
- Shallow chassis depth for easy installation in OB vehicles and consoles

PC Control and Configuration



Intuitive PC software makes it easy to configure, store and load presets




ORER PART NUMBER
AMP1-16-M: 8130-0400


3G/HD/SD-SDI Audio Monitor with Trim Control

AMP1-16-M

Rear Panel

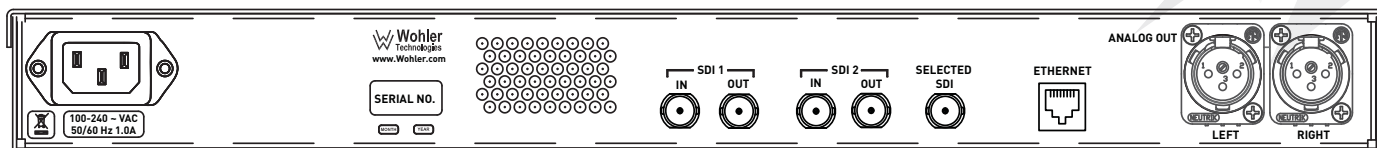

Block Diagram

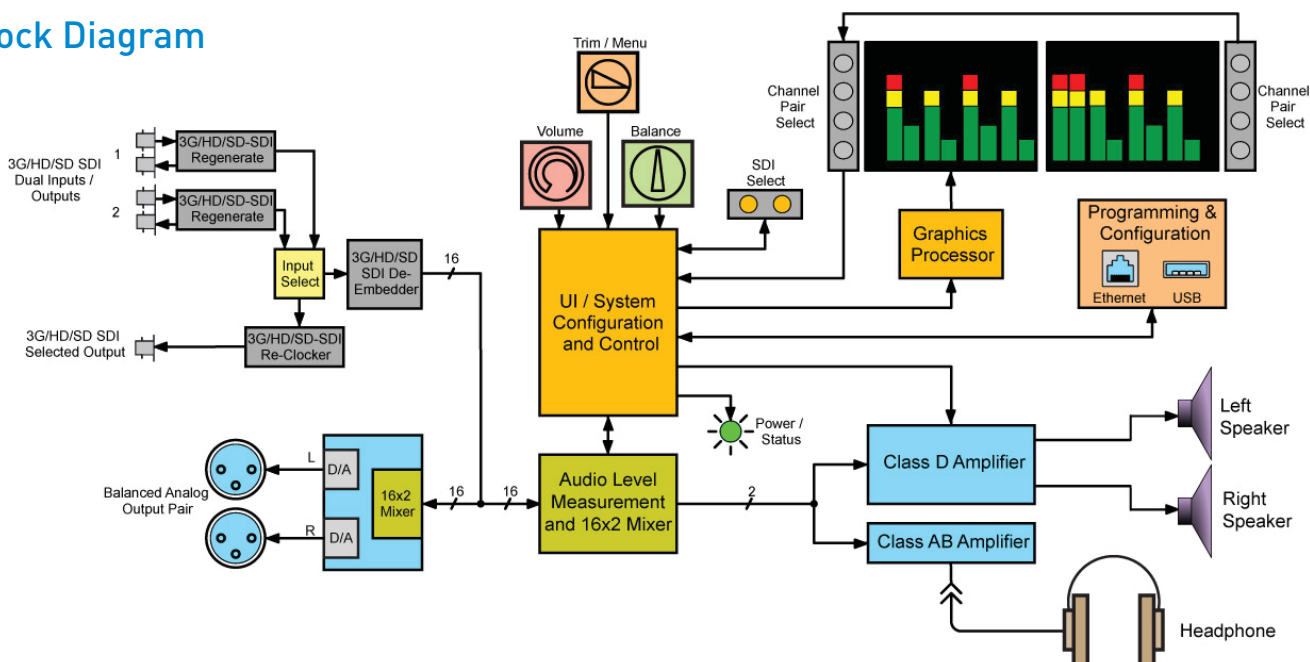

Preliminary Specifications

Inputs	Two 3G/HD/SD-SDI Inputs on BNC
Outputs	Two loop-through SDI Outputs on BNC Selected SDI Re-clocked Output on BNC Balanced stereo analog out on XLR-M
Interfaces	External PC control via Ethernet port Front panel USB port for preseln storage/transer
Front Panel Displays	Two 2.4" LED-backlit LCDs
Level Metering	Simultaneous average and PPM
Acoustic Frequency Response	150 Hz to 16 kHz (+- 5 dB) acoustic • 40 Hz to 20 kHz (+- 1dB) electrical
Peak Acoustic Output	90 dB SPL at 2 feet
Power Output	6 W RMS per side, 12 W peak
Hum and Noise	Better than -68 dB below full output
Power	IEC connector 100 to 240 VAC ± 10%, 50/60Hz 60 W; self-contained power supply
Dimensions (W x H x D)	4.25" x 19" x 1.75" (108 mm x 483 mm x 44 mm)
Shipping Weight/Net Weight	7 lbs (3.2 kg) / 5 lbs (2.8 kg)

Wohler Technologies, Inc.
Worldwide Headquarters
31055 Huntwood Avenue
Hayward, CA 94544 USA
Phone: +1 510 870 0810
Fax: +1 510 870 0811
Email: sales@wohler.com

Wohler Technologies/APAC
45/F, The Lee Gardens
33 Hysan Avenue
Causeway Bay, Hong Kong
Phone: +852 3180 2240
Fax: +852 3180 2299
Email: salesasia@wohler.com

Wohler Technologies/EMEA
Suite 3
Medaxon House
Mill Mead, Staines TW18 4UQ, UK
Phone: +44 (0) 1784 779815
Email: salesEMEA@wohler.com