Product Information Sheet

SVGA CABLES LOW SMOKE ZERO HALOGEN

38-0130 SVGA CABLE Male-Male, LFH, 1m
38-0131 SVGA CABLE Male-Male, LFH, 3m
38-0132 SVGA CABLE Male-Male, LFH, 5m
38-0133 SVGA CABLE Male-Male, LFH, 10m

DESCRIPTION

SVGA screened cables with moulded 15-pin D-sub miniature connectors and 5.5mm outer diameter 'Low Smoke Zero Halogen' cable. (LFH - 'Low Fire Hazard')

Cable lengths up to and including 10 metres maximum. Cables up to 5 metre cables utilising 30AWG conductors and 10 metre cables utilising 28AWG conductors for lower loss signal transfer.

Cables are designed for standard monitors and widescreen LCD's that require DDC cable, (Display Data Channel).

FEATURES/SPECIFICATIONS

HD15 male connectors

Black cable

Blue 45P PVC Insulated hoods

UL 20276 Low Smoke Zero Halogen Cables (3x Coax with conductors)

Aluminium Foil shield

1m to 5m Cable	30 AWG Conductors	5.5mm O.D.
10m Cable	28 AWG Conductors	6.0mm O.D.



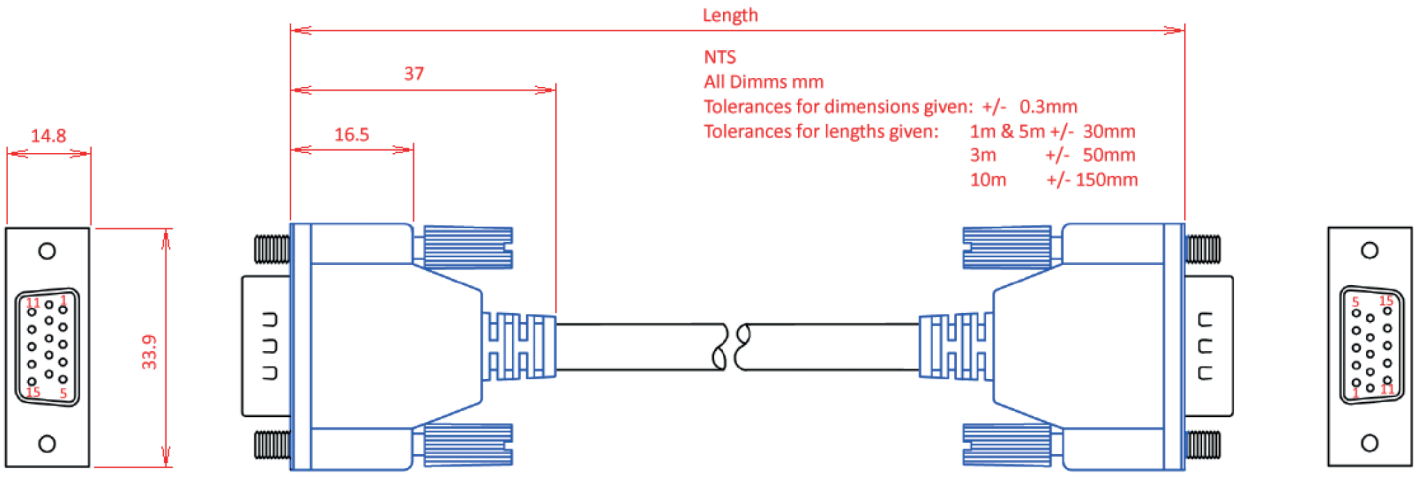

'LFH' is a registered trademark of Canford Audio Limited.