Product Information Sheet

CANFORD XLR Male cable connector 3 pin


41-9312 CANFORD XLR3MC XLR Male cable connector, 3 pin


DESCRIPTION

Canford XLR male cable connector featuring nickel-plated zinc diecast shells, silver-plated contacts and a triple position strain relief design. Features a reliable locking system for firm mating, ease of use and long service. Suitable for cable's types with outer diameters of 5.0 to 6.8mm as standard, smaller 3.3 to 4.8mm cables are accommodated by removing a washer, (item 5 in the diagram). Larger 7.0 to 8.0mm cables can be accommodated by removing the supplied standard white cable clamp and using a black cable gland which is an additional purchase.



Section A-A on page two of this document
Third Angle Projection
All dims in mm
Not to scale

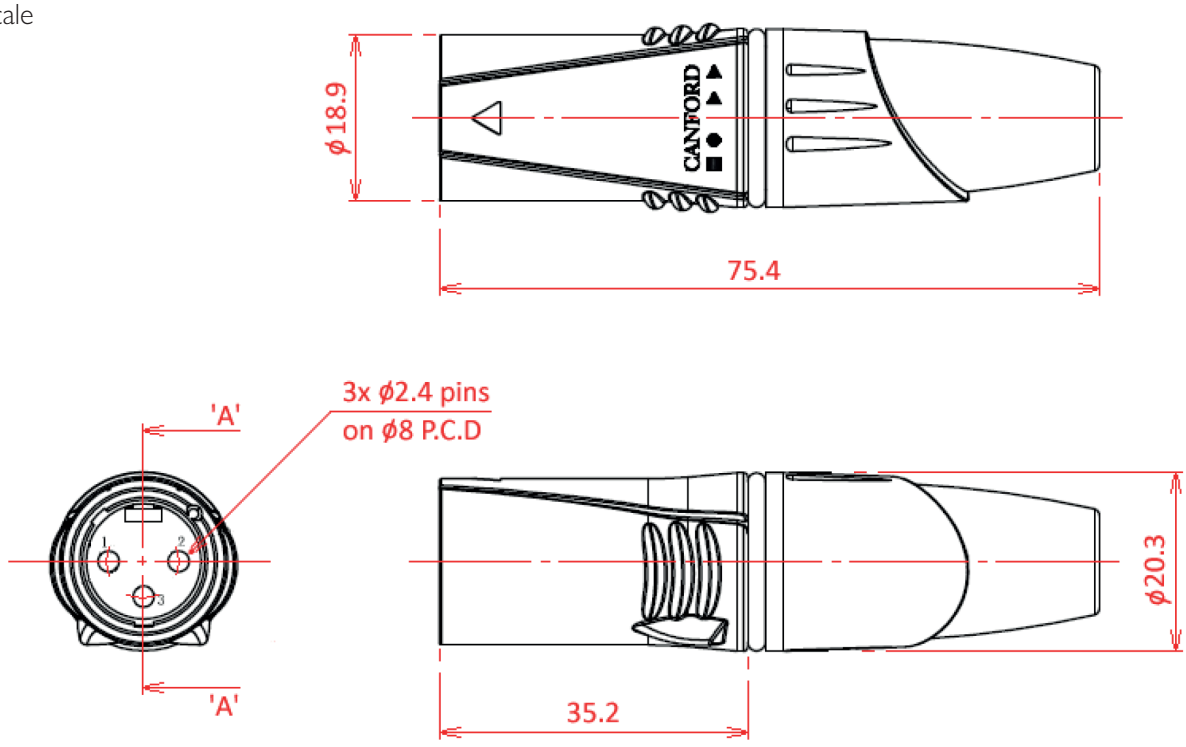

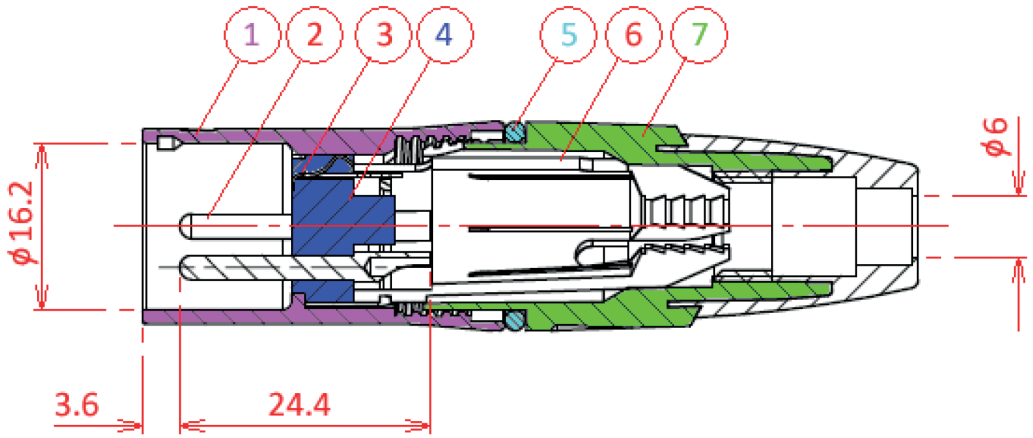

SECTION 'A-A'

Item	Description	Material		Finish
1	Die Cast Shell	ZZnAL4-1	(Zinc Alloy)	Nickel
2	Contact Pin	H59-1	(Brass)	Silver
3	Shell Ground	H62	(Brass)	Tin
4	Insulator	PA	(Nylon)	Black
5	O-Ring/Washer	Silicon		Black
6	Cable Clamp	POM	(Polyoxymethylene)	White
7	Cap & Cable Boot	PA6 & TPR	(Nylon & Thermoplastic Rubber)	Black & Grey