Technical Data Sheet

CANFORD D-SUB BREAKOUT CABLE

38-8114 CANFORD D-SUB BREAKOUT CABLE 25 pin male to 8x 1/4 inch, 3 pole, A gauge jack, 3m


Suitable for Analogue audio input or output, (depending on if the D-sub is attached to an analogue input our output on the host device), this cable assembly is wired to the Tascam DTRS convention.

Belden 7880A low-capacitance, individually screened, 110 Ohm eight-pair cable used.

The D-sub 25-pin male connector has a metal-body and sensibly-sized thumb-screws.



WIRING CONVENTION

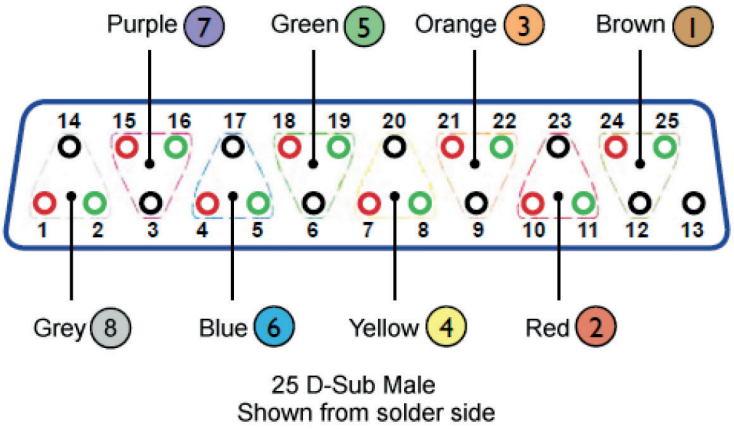

25 D-Sub Male
Shown from solder side

Cable Tail	Function	Connector
Brown	Audio 1 In or Out	3P Jack Plug
Red	Audio 2 In or Out	3P Jack Plug
Orange	Audio 3 In or Out	3P Jack Plug
Yellow	Audio 4 In or Out	3P Jack Plug
Green	Audio 5 In or Out	3P Jack Plug
Blue	Audio 6 In or Out	3P Jack Plug
Purple	Audio 7 In or Out	3P Jack Plug
Grey	Audio 8 In or Out	3P Jack Plug

Screen
+ve
- ve

APPROX. DIMENSIONS

