Technical Data Sheet

CANFORD D-SUB BREAKOUT CABLE

38-8111 CANFORD D-SUB BREAKOUT CABLE 25 pin male to 8x XLR male, 3m


Suitable for Analogue audio output this cable assembly is wired to the Tascam DTRS convention.

Belden 7880A low-capacitance, individually screened, 110 Ohm eight-pair cable used.

The D-sub 25-pin male connector has a metal-body and sensibly-sized thumb-screws.



WIRING CONVENTION

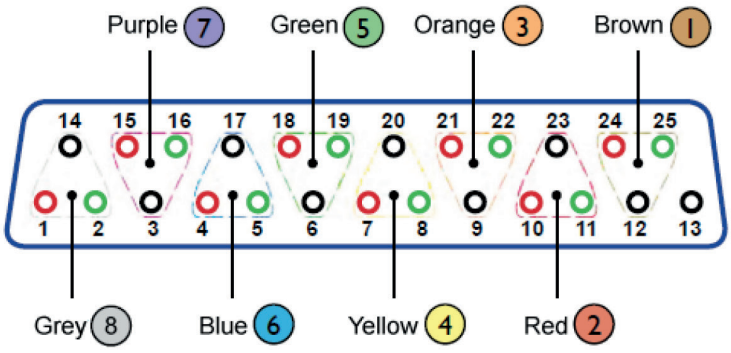

25 D-Sub Male
Shown from solder side

Cable Tail	Function	Connector
Brown	Audio 1 Output	XLRM
Red	Audio 2 Output	XLRM
Orange	Audio 3 Output	XLRM
Yellow	Audio 4 Output	XLRM
Green	Audio 5 Output	XLRM
Blue	Audio 6 Output	XLRM
Purple	Audio 7 Output	XLRM
Grey	Audio 8 Output	XLRM

Screen	
+ve	
- ve	

APPROX. DIMENSIONS

