Technical Data Sheet

CANFORD D-SUB BREAKOUT CABLE

38-8112 CANFORD D-SUB BREAKOUT CABLE 25 pin male to 8x XLR female, 3m


Suitable for Analogue audio input this cable assembly is wired to the Tascam DTRS convention.

Belden 7880A low-capacitance, individually screened, 110 Ohm eight-pair cable used.

The D-sub 25-pin male connector has a metal-body and sensibly-sized thumb-screws.



WIRING CONVENTION

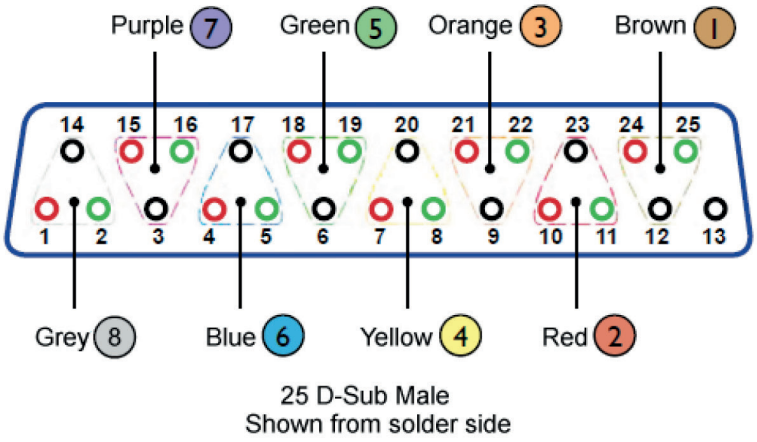

25 D-Sub Male
Shown from solder side

Cable Tail	Function	Connector
Brown	Audio 1 Input	XLRF
Red	Audio 2 Input	XLRF
Orange	Audio 3 Input	XLRF
Yellow	Audio 4 Input	XLRF
Green	Audio 5 Input	XLRF
Blue	Audio 6 Input	XLRF
Purple	Audio 7 Input	XLRF
Grey	Audio 8 Input	XLRF

Screen	
+ve	
- ve	

APPROX. DIMENSIONS

