Technical Data Sheet


CANFORD D-SUB BREAKOUT CABLE

38-8113 CANFORD D-SUB BREAKOUT CABLE 25 pin male to 4x XLR male and 4x XLR female, 3m

Suitable for AES digital audio I/O this cable assembly is wired to the Tascam convention. Belden 7880A lowcapacitance, individually screened, 110 Ohm eight-pair cable used. The D-sub 25-pin male connector has a metal-body and sensibly-sized thumb-screws.



WIRING CONVENTION

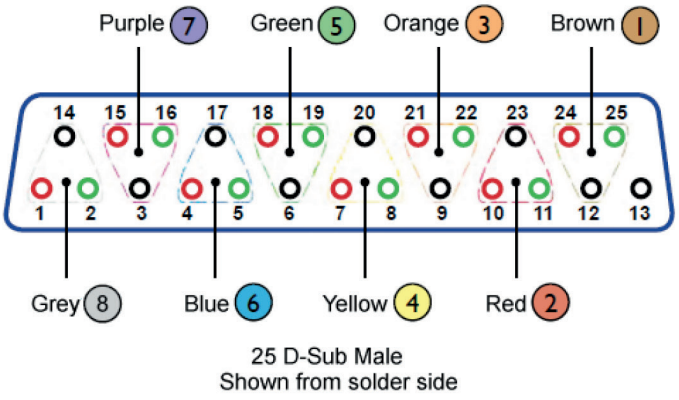

Cable Tail	Function	Connector
Brown	AES 1&2 Input	XLRF
Red	AES 3&4 Input	XLRF
Orange	AES 5&6 Input	XLRF
Yellow	AES 7&8 Input	XLRF
Green	AES 1&2 Output	XLRM
Blue	AES 3&4 Output	XLRM
Purple	AES 5&6 Output	XLRM
Grey	AES 7&8 Output	XLRM

Screen	
+ve	
- ve	

APPROX. DIMENSIONS

