
Technical Data Sheet

FLEXIBLE MAINS 3 CORE, BLACK RUBBER

33-341 FLEXIBLE MAINS 3 core 1.5 sq.mm, Black rubber
33-351 FLEXIBLE MAINS 3 core 2.5 sq.mm, Black rubber
33-371 FLEXIBLE MAINS 3 core 6 sq.mm, Black rubber

H07RN-F cables characterised by flexible plain copper conductors with a rubber insulation surrounded by a further Polychloroprene sheath. H07RN-F cables have the capacity to withstand most weather conditions with good resistance to oils and greases. Also good at withstanding mechanical and thermal stresses.

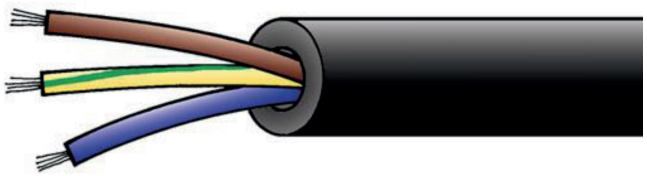

Temperature rating	-25oC to 60oC
Voltage	450/750V
Outer sheath colour	Black

	Size mm^2	Stranding	Voltage Drop V/A/km	Resistance Ω/km	O.D. mm	Weight kg/km
33-341	1.5	30/0.25	23	13.7	9.9	128
33-351	2.5	50/0.25	14	8.21	11.8	187
33-371	6	84/0.30	6.7	3.3	14.8	390