


## CANFORD SDV-HD CABLE Turquoise

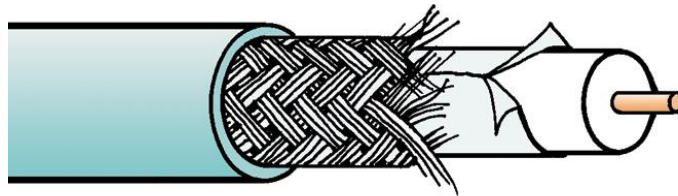

36-566 CANFORD SDV-HD CABLE Turquoise

Ultra low-loss coaxial 75 ohm cable specifically for HDTV and serial digital video signals.

Suitable crimp BNC's are available – see cable group Z BNC connectors on the Canford website.  
Due to the large diameter and rigidity of group Z cables, strain relief bushes are not required.

### Technical Specification:

Cable size group:	Z
Inner conductor:	1.63mm plain copper
Dielectric:	Gas injected foam high density polyethylene, 7.5mm O.D.
Screen 1:	Aluminium/polypropylene/aluminium tape
Screen 2:	Tinned copper braid, optical coverage 95%
Screening efficiency:	95%
Construction:	Coaxial cable
Jacket:	PVC, turquoise
Overall diameter:	10.2mm
Minimum bend radius:	100mm indoor
Impedance:	75 ohms
Capacitance:	56pF/m nominal
Return Loss:	≥26dB      50-300 MHz
	≥22dB      300-3000 MHz
	≥18dB      3000-3500 MHz
	≥15dB      3500-5000 MHz

Attenuation:	MHz	dB/100m
	10	1.3
	100	3.9
	200	5.3
	750	11.4
	1500	16.9
	3000	26.4
	6000	37.3
	9000	45.6
	12000	52.6

Weight:	13.6kg/100m
Reel length:	500m
Cut lengths:	Available in any multiple of 1 metre

Manufactured specifically for Canford by Draka Prysmium Multimedia.

'SDV' is a registered trademark of Canford Audio PLC.