Product Information Sheet

Canford Condenser Gooseneck XB Microphones - Dimensions

DESCRIPTION

Black slimline goosenecks with small high performance microphone head. Available in a range of lengths, the model code indicates the length from top of head to panel surface in mm. assuming the microphone is plugged into an XLR socket mounted in the panel.

Applications include conference, broadcast and PA work, talkback, and other areas where a discreet, small, flexibly mounted microphone is required.

XB type microphones have a XLR 3 pin male connector at the base and require 6-24 volts, (types C-XB24), or 25-52 volts, (types C-XB48), phantom power.

Supplied complete with windshield C13.


A UK electrical style white plastic mounting plate with XLR 3 pin female connector is also available (stock code 49-511) which fits directly onto woodwork, or onto walls and ceilings using either plaster type flush back box 49-578 or surface plastic box 49-519. For further details see Connector plates online.

TECHNICAL SPECIFICATION

Impedance:	200 ohms	**Front-to-back rejection:**	12dB (1kHz)
Sensitivity:	–62dB±3dB (0.95mV/µBar)	**Powering:**	XB24 type – 6-24 volts phantom
Frequency range:	50Hz–18kHz		XB48 type – 25-52 volts phantom
Polar response:	Cardioid		

DIMENSIONS

All Dimensions in mm

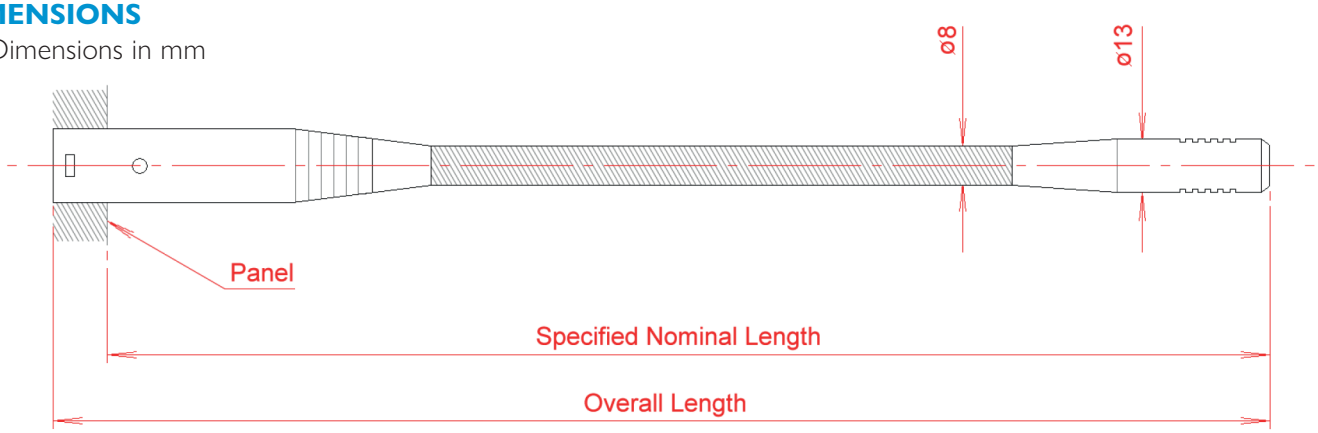

24V	48V	Description	Specified Length	Overall Length
53-032	53-132	CANFORD GOOSENECK MICROPHONE C175XB	175	188
53-037	53-137	CANFORD GOOSENECK MICROPHONE C425XB	425	438
53-038	53-138	CANFORD GOOSENECK MICROPHONE C475XB	475	488