Technical Data Sheet

DIN 41622 CONNECTOR 30 PIN FEMALE, SOLDER

47-301 DIN 41622 CONNECTOR 30 pin male, solder



TECHNICAL SPECIFICATION

No of contacts	30	Rated current	10A
Contact type	DIN 41622/41618	Withstand voltage	875 VRMS for 1 minute
Material contact	Copper alloy	Operating temperature	-20°C to +85°C
Plating contact	Au 0,8 µ	Max. processing temp.	230°C for 5 seconds
Material insulator	Thermoplast UL94V-0		

DIMENSIONS

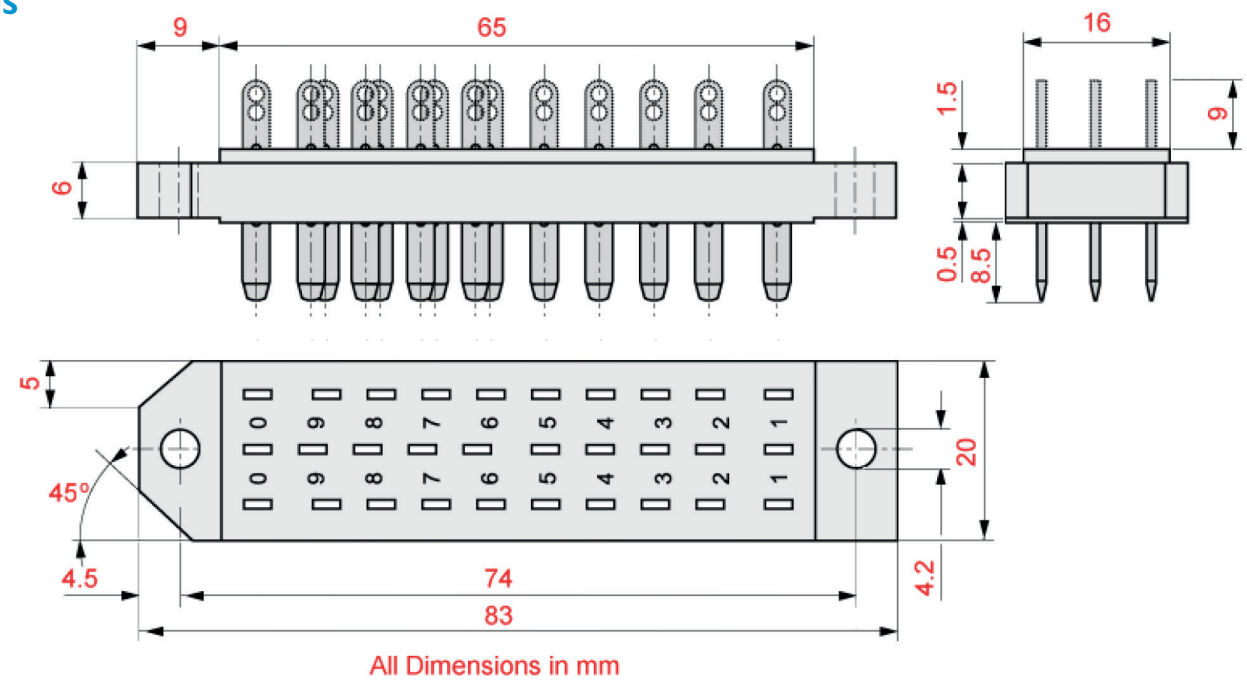

PANEL CUTOUT

