

L 300 10-10 Charger

FEATURES

- Charges 10 receivers and 10 batteries simultaneously
- Status LEDs
- Charging time 3h
- Power supply NT 6 included

Charging strip for EKI 830, RI 830, RI 830 S, HDI 830, RR 840 and RR 840 S receivers and the BA 300 rechargeable battery. The charging strip can charge 10 receivers and 10 BA 300 rechargeable batteries at the same time. Delivery includes the NT 6 power supply unit with national adapters for the EU, UK, US and AU.



ARCHITECT'S SPECIFICATIONS

The charger shall be capable of simultaneously charging up to ten RI 830, RI 830 S, HDI 830, RR 840 and RR 840 S receivers and up to ten individual BA 300 rechargeable batteries. LEDs at the charging slots shall indicate the charge status.

Charging current shall be 70 mA per charging slot, the current consumption shall be maximum 2 A. The input voltage shall be 6 V. Charging time for full charge shall be 3 hours. Operating temperature shall range from 0°C-40°C (32°F-104°F).

The charger dimensions shall be 400 x 130 x 50 mm (15.75" x 5.19" x 1.97").


Weight (unequipped) shall be approximately 530 grams (18.70 oz). The charger shall be the Sennheiser L 300 10-10.

TECHNICAL DATA

Charging current per slot	70 mA
Current consumption	max 2A
Voltage	6V DC
Weight	Approx. 530 g (18.70 oz)
Dimensions	400 x 130 x 50 mm (15.75" x 5.19" x 1.97")

L 300 10-10 Charger

DIMENSIONS

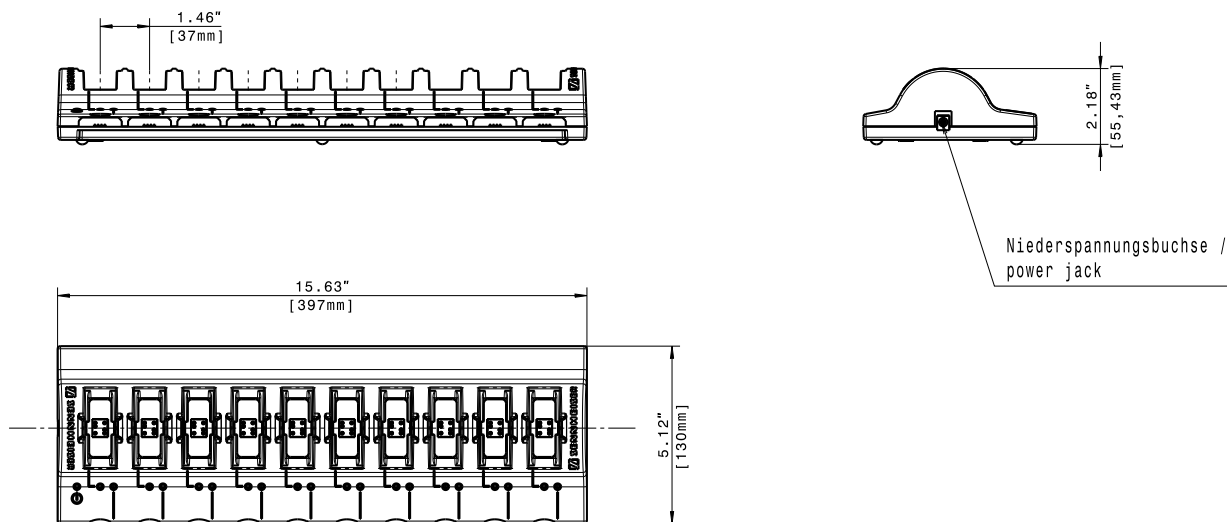

RECOMMENDED ACCESSORIES

NT 6-25 B Power supply Art. No. 534404

Sennheiser electronic GmbH & Co. KG
Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

 **SENNHEISER**