


BS-678T have a built-in attenuator and can be connected to a 2-wire or 3-wire system. The push-in type input connector makes cable connections easy and allows bridge wiring. position of the transformer. Two built-in 6-inch double cone speaker units deliver high quality sound. if an outward force is applied to. The input impedance can be easily changed by changing the tapstructure that permits direct wall-mounting with screws prevents the speaker from falling easily even. Either concealed in-wall wiring or exposed wiring can be used for speaker cable connection. The speaker. The BS-678T, of which cabinet is made of wood, can be installed in a vertical or horizontal orientation.

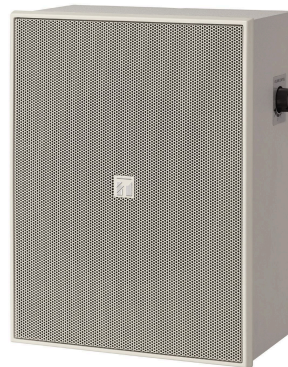

Article number:BS-678T

Specifications

Dimensions (W x H x D)	250 x 190 x 110 mm
Dimensions (ø x D)	x 110 mm
Finish	MDF, off-white (RAL 9010 or equivalent),
Operating temperature	-10°C to +50°C

Appearance

