




Technical Data Sheet

CANFORD SDV-L-UHD-LFH CABLE 4K, ECA

36-716 CANFORD SDV-L-UHD-LFH CABLE 4K, Eca, turquoise

Coaxial 75 ohm cable specifically for serial digital video signals, with compact size and low smoke-zero halogen material outer jacket.

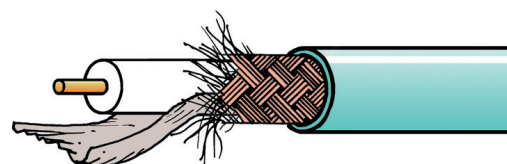

TECHNICAL SPECIFICATION

Cable size group:	Does not fit within the Canford scheme
Suitable Connectors:	48-6378 NEUTRIK-NBNC75BXU13X 48-5070 COAX-CONNS-10-005-W126-FF
Inner conductor:	Solid copper wire, silvered, diameter 1.2mm
Dielectric:	Foam-PE, diameter 4.9mm
Screen:	Al-PET-Al-foil under tinned copper braid, diameter 5.7
Sheath:	FRNC, RAL 6018, diameter 7.0mm
Construction:	Coaxial cable
Jacket:	Low smoke zero halogen material, (FRNC: IEC 60332-1; IEC 60754-2; IEC 61034)
CPR Classification:	CPR Eca
Overall diameter:	7.0mm
Impedance:	75 ohm
Capacitance:	56pF/m nominal
Return loss:	22dB nom. 300-3000 MHz 18dB nom. 3000-3500 MHz 15dB nom. 3500-6000 MHz

Attenuation:	MHz	dB/100m
	10	1.6
	100	5.3
	200	7.6
	300	9.3
	500	12.3
	1000	17.4
	1500	22.0
	3000	31.0
	6000	44.7
	9000	54.7
	12000	63.2
Weight:	63kg/1km	
Reel length:	1km	
Cut lengths:	Available in any multiple of 1 metre	

Manufactured by Draka, part of the Prysmian group of companies.
'SDV' and 'LFH' are registered trademarks of Canford Audio Limited.