

PODCASTER

Broadcast Quality USB Microphone

RØDE[®]
MICROPHONES




Features

- Broadcast Sound Quality
- 28mm dynamic capsule
- 18-bit resolution, 8-48kHz sampling
- Windows and Mac compatible
- Powered by USB bus
- Internal capsule shock mounting
- 3.5mm stereo headphone output with volume control built-in to body
- Ideal for voice recognition software
- Designed and manufactured in Australia
- Full 10 year warranty*


Specifications

Acoustic Principle	Dynamic	Directional Pattern	Cardioid
Frequency Range	40Hz ~ 14,000Hz	Sensitivity	-30dB \pm 2dB re 1V/Pa @ 1kHz
Active Electronics	Analogue signal conditioning + A/D and USB interface	Analogue Output I/F:	Headphone audio output. Drives 150mW into 32 Ω Output level adjustment.
Sensitivity	-51dBu \pm 3dB re 1V/Pa @ 1kHz	Resolution:	18bits
Maximum SPL	115dB (@ 1kHz, 1% THD into 1k Ω load)	Signal/Noise	78dB SPL (A - weighted per IEC651)
Power Req.	Supplied by USB port	Dimensions	Length - 215mm Diameter - \varnothing 56mm
Output Connection	USB Digital Interface	Net Weight	610g (21.5oz)

Frequency Response

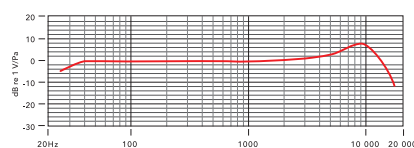

Polar Pattern



Included Accessories

- RM2 stand mount
- 3m (1") USB cable



*After online registration

Australia
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
6385 Rose Lane, Carpinteria CA 93013 USA
Ph: +1 805 566 7777 Fx: +1 805 566 0071

www.rodemic.com